

**Declaration Owner**

Elkay Manufacturing Company
1333 Butterfield Road, Suite 200, Downers Grove, IL 60515
+1 (800) 476-4106 | www.elkay.com

Product

Elkay Pro Filtration™ Bi-level Bottle Filling Station

Functional Unit

1 packaged, installed unit with a Reference Service Life of 10 years in a building with an Estimated Service life of 75 years.
The scope of this EPD is Cradle-to-Grave.

EPD Number and Period of Validity

SCS-EPD-10475 v.1.1 as of July 20, 2026
EPD Valid August 18, 2025 through August 17, 2030

Product Category Rule

UL PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 4 (December 2022).

UL PCR Guidance for Building-Related Products and Services Part B: Kitchen and Bath Fixture Fittings and Accessory Products EPD Requirements. Version 1 (October 2020).

Program Operator

SCS Global Services
2000 Powell Street, Ste. 600, Emeryville, CA 94608
+1.510.452.8000 | www.SCSglobalServices.com



Declaration owner:	Elkay Manufacturing Company
Address:	1333 Butterfield Road, Suite 200, Downers Grove, IL 60515
Declaration Number:	SCS-EPD-10475
Declaration Validity Period:	August 18, 2025 through August 17, 2030
Program Operator:	SCS Global Services
Declaration URL Link:	https://www.scsglobalservices.com/certified-green-products-guide
LCA Practitioner:	Millicent Gabriel, SCS Consulting Services
General Program Instructions and Version Number:	SCS Type III Environmental Declaration Program: Program Operator Manual. V12.0 December 2023. SCS Global Services.
LCA Software and LCI database:	OpenLCA 2.5 software and the Ecoinvent v3.11 database
Product's Intended Application:	For use with plumbing systems to deliver and drain water.
Product RSL:	10 Years (ESL 75 Years)
Markets of Applicability:	North America
EPD Type:	Product Average
EPD Scope:	Cradle-to-Grave
LCIA Method and Version:	CML-IA Baseline and TRACI 2.1
Independent critical review of the LCA and data, according to ISO 14044 and ISO 14071	☐ internal ☒ external
LCA Reviewer:	 Lindita Bushi, PhD., Athena Sustainable Materials Institute
Part A Product Category Rule:	UL PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 4. December 2022.
Part A PCR Review conducted by:	Lindita Bushi, PhD (Chair); Hugues Imbeault-Tétreault, ing., M.Sc.A.; Jack Geibig
Part B Product Category Rule:	UL PCR Guidance for Building-Related Products and Services Part B: Kitchen and Bath Fixture Fittings and Accessory Products EPD Requirements. Version 1.0. October 2020
Part B PCR Review conducted by:	Thomas Gloria (Chair), Industrial Ecology Consultants; Christopher Marozzi, Lixil Water Technologies Americas; Kim Lewis, Sustainable Minds
Independent verification of the declaration and data, according to ISO 14025, ISO 21930, and the PCR	☐ internal ☒ external
EPD Verifier:	 Lindita Bushi, PhD., Athena Sustainable Materials Institute
Declaration Contents:	1. ABOUT ZURN ELKAY WATER SOLUTIONS2 2. PRODUCT2 3. LCA: CALCULATION RULES7 4. LCA: TECHNICAL INFORMATION AND SCENARIOS 12 5. LCA: RESULTS..... 16 6. LCA: INTERPRETATION 19 7. ADDITIONAL ENVIRONMENTAL INFORMATION 22 8. REFERENCES 22
Disclaimers: This EPD conforms to ISO 14025, 14040, 14044, and ISO 21930. Scope of Results Reported: The PCR requirements limit the scope of the LCA metrics such that the results exclude environmental and social performance benchmarks and thresholds, and exclude impacts from the depletion of natural resources, land use ecological impacts, ocean impacts related to greenhouse gas emissions, risks from hazardous wastes and impacts linked to hazardous chemical emissions. Accuracy of Results: Due to PCR constraints, this EPD provides estimations of potential impacts that are inherently limited in terms of accuracy. Comparability: The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results, due to and not limited to, the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled. In accordance with ISO 21930:2017, EPDs are comparable only if they comply with the core PCR, use the same sub-category PCR where applicable, include all relevant information modules and are based on equivalent scenarios with respect to the context of construction works. The owner of the declaration shall be liable for the underlying information and evidence; SCS shall not be liable with respect to manufacturer information, life cycle assessment data, and evidence supplied or made available to SCS.	

1. ABOUT ZURN ELKAY WATER SOLUTIONS

Zurn Elkay Water Solutions supplies the industry's widest range of clean water solutions for drinking water, hygiene, and sustainable water management. Headquartered in Milwaukee, Wisconsin, Zurn Elkay Water Solutions works with customers around the globe to deliver products and systems that enhance and promote water quality, safety, hygiene, flow control and conservation.

2. PRODUCT

2.1 Product Description

Elkay is proud to offer their next generation of Bottle Filling Stations, Elkay Pro Filtration™ (EPF). Elkay Pro Filtration™ Bottle Filling Stations offer simplified maintenance and reliability. With an advanced filtration system and innovative design, maintaining filtered drinking water is easier than ever. Filters are accessible from the top of the Bottle Filling Station for easy filter changes in a matter of seconds. They are compatible with Elkay Pro Filtration™ filters, which offer high-capacity filtration up to 20,000 gallons for certain lines and high reduction of contaminants such as total PFAS*, lead, microplastics, asbestos and more. Enhance the system's filtration with the stage 1 sediment filter, which reduces sediment buildup caused by municipal water supply. The products covered in this EPD include one bi-level filtered water dispenser with a standard electrical shroud (the LZS line) and one bi-level filtered water dispenser with a heavy-duty vandal-resistant shroud (the LVRC lines). The results presented for these lines represent a product average of ninety-six variants for the LZS line and sixteen for the LVRC line. All Elkay Bottle Filling Station products reviewed in this report belong to the Construction Specifications Institute (CSI) code 22 47 14 and 22 24 13 and UNSPSC7 code 30181700.

Table 1. Product line specifications.

Bottle Filling Station Line	Models Included	Model Image	Features
Elkay Pro Filtration™ Bi-level	LZS (top image) and LVRC (bottom image) See the Appendix for SKUs		■ Touch-free sensor operated bottle filling station ■ Filters are accessible from the top of the bottle filling station for easy filter changes in a matter of seconds ■ Standard electrical shroud (LZS) and vandal-resistant heavy-duty shroud (LVRC) models ■ Up to 20,000 gallon filtration capacity ■ Smart Connected monitoring capability standard ■ High reduction of contaminants such as total PFAS, lead, microplastics, asbestos and more ■ Laminar flow ■ Filter status indicator ■ UV-C LED available at the dispense point ■ Stage 1 sediment filter available which reduces sediment buildup caused by the municipal water supply

*According to NSF/ANSI 53

2.2 Flow Diagram

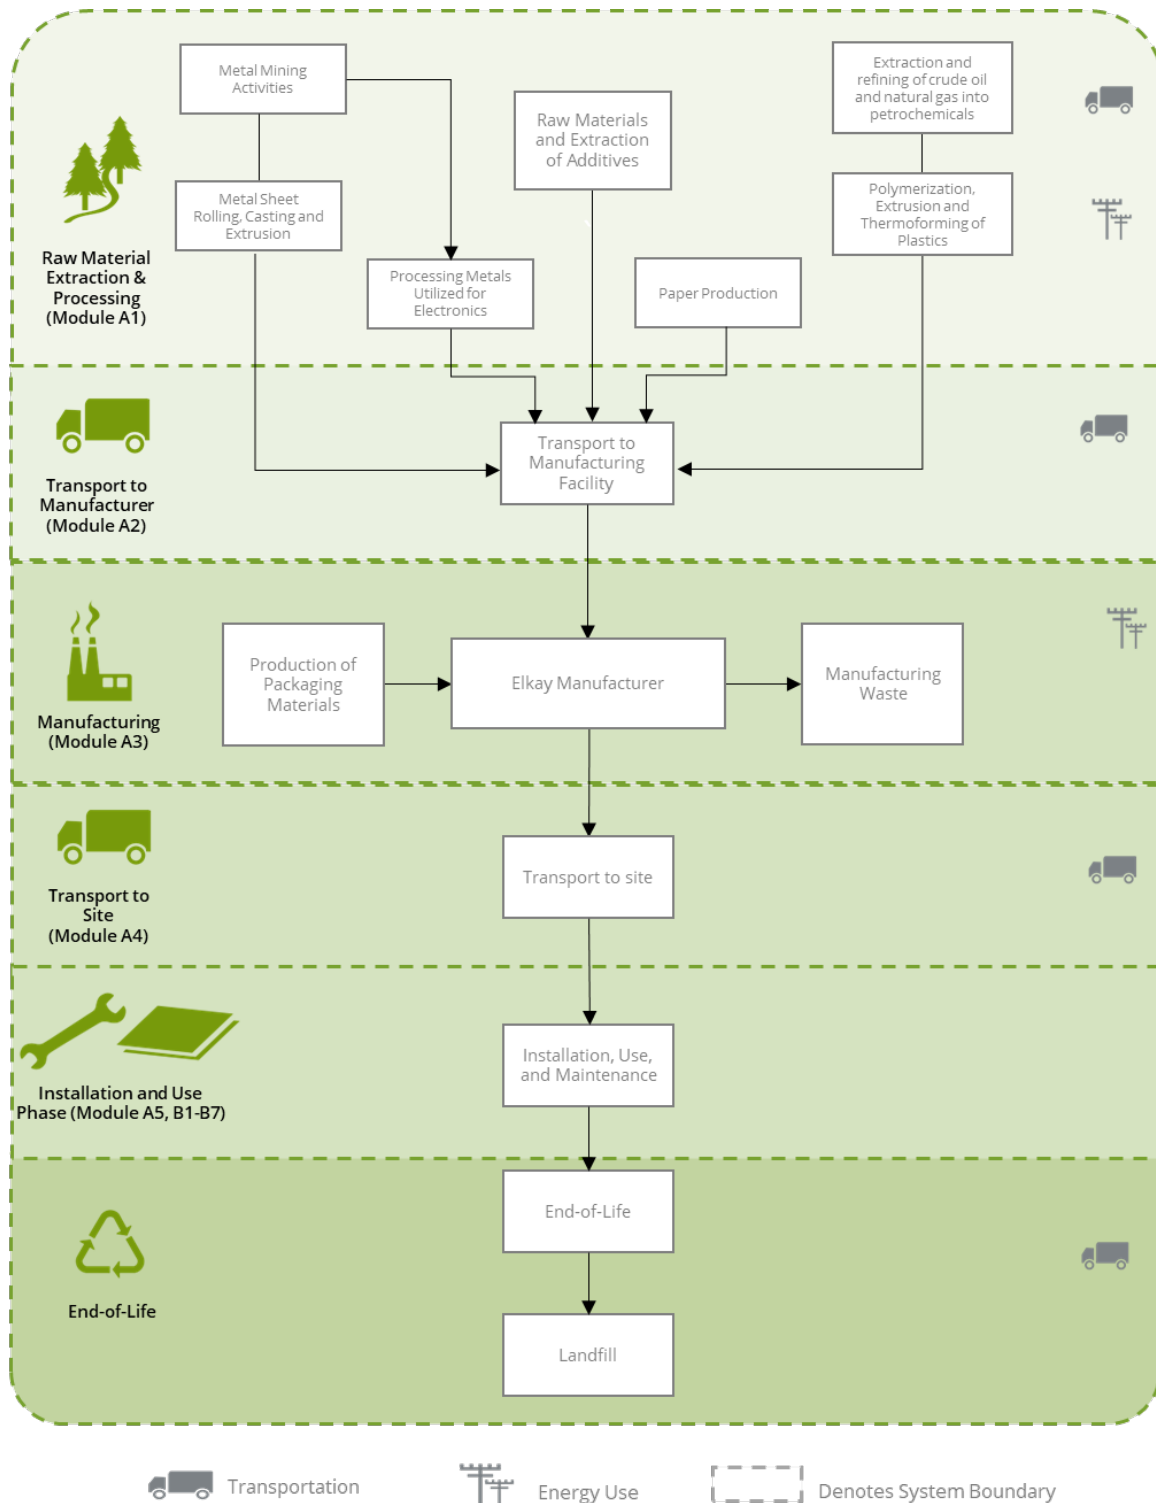


Figure 1. Flow diagram and system boundaries for the Elkay Pro Filtration™ Bi-level Bottle Filling Station.

2.3 Application

Elkay Pro Filtration™ Bottle Filling Stations are installed in commercial, industrial, and institutional markets across North America and are designed for use with plumbing systems to deliver drinking water.

2.4 Declaration of Methodological Framework

The scope of the EPD is cradle-to-grave, including raw material extraction and processing; raw material transportation; product manufacture, including packaging; product distribution; installation; use; and end-of-life.

Manufacturing resource use was allocated to the products on a unit basis. Impacts from transportation were allocated based on the mass of material and distance transported.

Consistent with the PCR, processes contributing greater than 1% of the total environmental impact indicator for each impact are included in the inventory. No known flows were deliberately excluded from this EPD.

2.5 Technical Requirements

Table 2. *Elkay Pro Filtration™ Bi-level Bottle Filling Station Technical Requirements.*

Property	Unit	Value
Width	mm	483
Length	mm	933
Height	mm	1190
Maximum flow rate	GPM	1.5*

*Maximum flow rate varies by filter – Elkay Pro Filtration filter (model #FL10) has a rate of 1.5 GPM. This flow rate was used to model water usage in this LCA.

2.6 Market Placement/Application Rules

The products declared in this document comply with the following codes or regulations:

- ✓ ADA & ICC A117.1†
- ✓ FCC & ISED
- ✓ NSF/ANSI 42, 53, 61, 372, 401
- ✓ UL 399
- ✓ CAN/CSA C22.2 No. 120

2.7 Properties of Declared Product as Delivered

Elkay bottle filling stations are delivered by truck to the installation site. The total nominal weight of the Elkay Pro Filtration™ Bi-level product with packaging is 49 kg for the LZS standard bi-level line and 51.4 kg for the LVRC vandal-resistant bi-level line. The nominal dimensions are: **Height** 46.9" (1190 mm), **Width** 19" (483 mm), **Length** 36.75" (933 mm).

2.8 Material Composition

The main product materials for the average product are presented in Tables 3 and 4. Product materials were reviewed for the presence of any toxic or hazardous chemicals. Based on a review of the product components provided by the manufacturer, no regulated chemicals were identified in the product or product components. Please note that within each product line, the product composition differs by no more than ±10% for any environmental impact indicator.

†ADA and ICC A117.1 compliant when installed within the guidelines set out in these standards

Table 3. *Elkay Pro Filtration™ LZS Bi-level Bottle Filling Station Material Components.*

Raw Materials	Mass Final Product (kg)	% Mass Final Product
PCBA	0.091	0.20%
Sensor Assembly and Power Switch	0.007	0.02%
Foam Insulation	0.024	0.05%
Plastic (Unspecified)	0.730	1.59%
Polypropylene	0.267	0.58%
Polyethylene	4.02	8.77%
Plastic ABS	0.203	0.44%
Power Supply	0.091	0.20%
Compressor	8.19	17.9%
Solenoid Valve	0.680	1.48%
Galvanized Steel	8.15	17.8%
Copper Coil and Tubing	1.62	3.53%
Brass	0.020	0.04%
Stainless Steel Fixtures	19.3	42.1%
Wire Harness	1.09	2.38%
Armaflex Rubber Foam	0.105	0.23%
Material Coloring	0.001	0.002%
Nylon	0.023	0.05%
Polyacetal Copolymer	0.004	0.01%
Glass	0.240	0.52%
Ferrite	0.064	0.14%
Suva R134A	0.12	0.26%
Activated Carbon	0.816	1.78%
Total:	45.9	100%

Table 4. *Elkay Pro Filtration™ LVRC Bi-level Bottle Filling Station Material Components.*

Raw Materials	Mass Final Product (kg)	% Mass Final Product
PCBA	0.091	0.18%
Sensor Assembly and Power Switch	0.007	0.01%
Foam Insulation	0.024	0.05%
Plastic (Unspecified)	0.730	1.45%
Polypropylene	0.280	0.56%
Polyethylene	4.04	8.03%
Plastic ABS	0.38	0.76%
Power Supply	0.091	0.18%
Compressor	8.19	16.3%
Solenoid Valve	0.227	0.45%
Galvanized Steel	8.76	17.4%
Copper Coil and Tubing	1.77	3.52%
Brass	0.900	1.79%
Stainless Steel Fixtures	22.4	44.5%
Wire Harness	1.10	2.19%
Armaflex Rubber Foam	0.066	0.13%
Material Coloring	0.001	0.002%
Nylon	0.0236	0.05%
Polyacetal Copolymer	0.004	0.01%
Glass	0.241	0.48%
Ferrite	0.064	0.13%
Suva R134A	0.12	0.24%
Activated Carbon	0.816	1.62%
Total:	50.3	100%

2.9 Manufacturing

Elkay Bottle Filling Stations are manufactured in Lanark, Illinois. The manufacturing process consists of assembling parts via power drill and screws, cutting and fitting plastic pieces such as tubes and foam, integrating electronic components and packaging of the final bottle filling station products. Raw materials for assembly include electronic components, steel, mechanical components, and additional materials such as foam insulation and plastics. Primary data from twelve months of manufacturer provided data was used to model production, resource use, electricity consumption, and waste generation at the facilities. Electricity consumption is modeled using Ecoinvent datasets for the regional resource mix with the closest match to the facility. The final products are then sorted and packaged for distribution.

2.10 Transportation

Transportation mode and distance from the manufacturing facility in Lanark, Illinois to Elkay's distribution center was provided by Elkay. Distribution data from the distribution center to various points of purchase was not available and therefore an estimate was utilized to model sale and distribution of Elkay Bottle Filling Stations to various locations across the United States. An average of the distance to the five largest cities in the United States was utilized to estimate the transport of the Bottle Filling Stations from the distribution center to points of purchase. Transportation from point of purchase to installation sites in the United States are assumed to be 500 km by truck, consistent with the PCR requirements.

2.11 Installation

Installation of Elkay Bottle Filling Stations are completed using manual labor and does not require additional ancillary materials. Waste is generated from the disposal of packaging material at the installation site.

2.12 Packaging

Table 5. *Elkay Pro Filtration™ LZS Bi-Level Bottle Filling Station Packaging Components.*

Packaging	Mass (kg)	% Mass	% Recycled Content
Cardboard	4.88	97.7%	80%
Polyethylene Packaging	4.56x10 ⁻²	0.91%	0%
Labels	6.99x10 ⁻²	1.40%	0%
Total:	4.99	100%	-

Table 6. *Elkay Pro Filtration™ LVRC Bi-level Bottle Filling Station Packaging Components.*

Packaging	Mass (kg)	% Mass	% Recycled Content
Cardboard	4.88	97.8%	80%
Polyethylene Packaging	3.95x10 ⁻²	0.79%	0%
Labels	6.99x10 ⁻²	1.40%	0%
Total:	4.99	100%	-

2.13 Use Conditions

Water use impacts were modeled following guidance from the Part B PCR for a commercial water filler. Typical maintenance involves cleaning of the Bottle Filling Station unit with cleaning solution and a damp cloth. No known repairs are needed for the Bottle Filling Stations over their known service life. Replacement of filters is assumed to be annual per manufacturer recommendations.

2.14 Product Reference Service Life and Building Estimated Service Life

The PCR establishes a Reference Service Life for Bottle Filling Stations of 10 years. The PCR also establishes an Estimated Service Life of the building to be 75 years to fulfill the required performance and functionality over the construction works.\

2.15 Re-Use Phase

It is assumed that no materials or Bottle Filling Stations are recovered and processed for re-use.

2.16 Disposal

It is assumed that Bottle Filling Stations at end-of-life are disposed of in a landfill. Transportation of Bottle Filling Stations assumes a 100-kilometer distance to disposal as specified in the PCR.

3. LCA: CALCULATION RULES

3.1 Functional Unit

The functional unit used in the study is one (1) packaged and installed unit with a reference service life (RSL) of 10 years to be installed in a building with an estimated service life (ESL) assumed to be 75-years.

Table 5. *Elkay Pro Filtration™ Bi-level Bottle Filling Station Functional Unit Properties.*

Property	Unit	Value
Functional Unit	-	One (1) packaged, installed product
RSL	Years	10
ESL	Years	75
Mass including packaging	kg	50.8 for LZS; 55.3 for LVRC
Flush rate	m ³ /sec	N/A
Flow rate	m ³ /sec	9.45x10 ⁻² ‡

‡ Elkay Pro Filtration filter (model #FL10) used to model the flow rate for this LCA

3.2 System Boundary

The scope of the EPD is cradle-to-grave, including raw material extraction and processing; raw material transportation; product manufacture, including packaging; product distribution; installation; use; and end-of-life disposal.

Table 6. *Elkay Bottle Filling Stations System Boundaries.*

Product			Construction Process		Use								End-of-life				Benefits and loads beyond the system boundary
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7		C1	C2	C3	C4	D
Raw material extraction and processing	Transport to manufacturer	Manufacturing	Transport	Construction - installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use		Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, recovery and/or recycling potential
X	X	X	X	X	X	X	X	X	X	X	X		X	X	X	X	MND

X = Included in system boundary | MND = Module not declared

3.3 Product Specific Calculations for Use Phase (Modules B1-B7)

Water usage was modeled following guidance of the Part B PCR and shown in Table 14. Primary data for energy usage of Bottle Filling Stations was not available and therefore modeled based on drinking fountain electricity usage provided by a study conducted by the North Carolina Department of Environmental Quality¹.

3.4 Estimates and Assumptions

- Specific data were not available on the printed circuit boards, sensors, power supply, solenoid valve and compressors in the Bottle Filling Stations. Secondary datasets for a were used from the Ecoinvent database to best represent the data in the LCA model.
- The increased complexity of printed circuit boards with the ability to connect to the internet were modeled using a secondary dataset from the Ecoinvent database for logic type integrated circuit boards. All other chips were modeled using memory type circuit boards.
- The filters utilized in these products are assumed to be replaced annually, as recommended by the manufacturer.
- Product transport from point of purchase to the building site is assumed to be 500 km by truck as required by the Part B PCR.
- Product transport from the Elkay distribution centers to points of purchase was not available, therefore products were assumed to be transported to the five largest cities across the United States.
- Installation of the products is assumed to be manual, using hand tools, requiring no additional materials or energy use.
- Transport of the packaging waste at installation is assumed to be 100 km by truck as required by the Part B PCR.
- Transport of the product at end-of-life to waste processing and disposal is assumed to be 100 km by truck as required by the Part B PCR.
- The Reference Service Life (RSL) of the products was modeled as 10 years, as required by the Part B PCR.
- The maintenance of the products is assumed to include daily cleaning with a cleaning solution of 10 ml of 1% sodium lauryl sulfate solution as specified in the Part B PCR. A dataset for sodium lauryl sulfate was not available and a dataset for cleaning consumables was utilized instead.
- The products are assumed to require no replacement, repair, or refurbishment during the 10-year RSL, but in accordance with the Part A PCR and Part B PCR, requires replacement 6.5 times over the 75-year ESL.
- The use phase modules are modeled for the building/construction works ESL of 75 years.
- Data on energy usage for the Bottle Filling Stations was not available and estimated based on drinking fountain electricity usage provided by the North Carolina Department of Environmental Quality.
- For the product end-of-life, disposal of product is assumed to follow the disposal scenario indicated in the Part A PCR.

3.5 Cut-off Rules

According to the PCR, processes contributing greater than 1% of the total environmental impact indicator for each impact are included in the inventory. No data gaps were allowed which were expected to significantly affect the outcome of the indicator results.

¹ State Energy Office, N.C. Department of Administration and the U.S. Department of Energy. "Drinking Fountains & Water Coolers Energy Saving Fact Sheet." March 2010. <https://www.deq.nc.gov/environmental-assistance-and-customer-service/ias-energy-efficiency/opportunities/drinking-fountains/download>

3.6 Data Sources

Primary data were provided by Elkay for the Lanark, Illinois facility. To the extent available, primary data are used for foreground processes (e.g., product manufacturing), while background processes in this study are modeled using secondary data sourced from the Ecoinvent 3.11 LCI databases with a bias towards the most recent and representative data.

Table 7. LCI datasets and associated databases used to model the Elkay Pro Filtration™ Bottle Filling Station.

Component	Dataset	Geography	Data Source	Publication Date
Product				
Printed Circuit Board Assembly (PCBA)	market for electronic component, active, unspecified electronic component, active, unspecified Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
	market for integrated circuit, memory type integrated circuit, memory type Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
	market for integrated circuit, logic type integrated circuit, logic type Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Sensor Assembly and Power Switch	market for electronic component, active, unspecified electronic component, active, unspecified Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Foam Insulation	polystyrene production, expandable polystyrene, expandable Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
	market for polyurethane, flexible foam polyurethane, flexible foam Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Plastic (Unspecified)	polyvinylchloride production, suspension polymerisation polyvinylchloride, suspension polymerised Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
	market for extrusion, plastic pipes extrusion, plastic pipes Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Polypropylene	market for polypropylene, granulate polypropylene, granulate Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
	market for extrusion, plastic pipes extrusion, plastic pipes Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Polyethylene	market for polyethylene, low density, granulate polyethylene, low density, granulate Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
	market for extrusion, plastic pipes extrusion, plastic pipes Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Plastic ABS	acrylonitrile-butadiene-styrene copolymer production acrylonitrile-butadiene-styrene copolymer Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
	market for extrusion of plastic sheets and thermoforming, inline extrusion of plastic sheets and thermoforming, inline Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Power supply	market for power supply unit, for desktop computer power supply unit, for desktop computer Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Compressor	market for air compressor, screw-type compressor, 4kW air compressor, screw-type compressor, 4kW Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Galvanized Steel Sheets	market for steel, low-alloyed, hot rolled steel, low-alloyed, hot rolled Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
	market for zinc coat, pieces zinc coat, pieces Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Copper Coil and Tubing	market for copper, cathode copper, cathode Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
	market for metal working, average for copper product manufacturing metal working, average for copper product manufacturing Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Brass Washer	market for brass brass Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
	market for casting, brass casting, brass Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Stainless Steel Fixtures	market for steel, chromium steel 18/8 steel, chromium steel 18/8 Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024

Component	Dataset	Geography	Data Source	Publication Date
	market for metal working, average for steel product manufacturing metal working, average for steel product manufacturing Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Screws	market for zinc coat, pieces zinc coat, pieces Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
	market for wire drawing, steel wire drawing, steel Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Armaflex Rubber Foam	market for cork, raw cork, raw Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
	market for polyurethane adhesive polyurethane adhesive Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
	market for synthetic rubber synthetic rubber Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Suva R134A	market for refrigerant R134a refrigerant R134a Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Material Coloring	market for coating powder coating powder Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Nylon	market for nylon 6 nylon 6 Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Aerator, Polyacetal Copolymer	market for glass fibre reinforced plastic, polyamide, injection moulded glass fibre reinforced plastic, polyamide, injection moulded Cutoff, GLO	GLO	Ecoinvent 3.11	2024
Activated Carbon	activated carbon production, granular from hard coal activated carbon, granular Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Ferrite	market for ferrite ferrite Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Wire Harness	market for copper, cathode copper, cathode Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
	wire drawing, copper wire drawing, copper Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
	polyethylene production, low density, granulate polyethylene, low density, granulate Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
	extrusion of plastic sheets and thermoforming, inline extrusion of plastic sheets and thermoforming, inline Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Packaging				
Cardboard	market for corrugated board box production corrugated board box Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Polyethylene Packaging	market for packaging film, low density polyethylene packaging film, low density polyethylene Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Labels	market for paper, newsprint paper, newsprint Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Transport				
Ship	market for transport, freight, sea, container ship transport, freight, sea, container ship Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Truck	market for transport, freight, lorry 16-32 metric ton, EURO4 transport, freight, lorry 16-32 metric ton, EURO4 Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Manufacture Inputs				
Electricity	electricity voltage transformation from high to medium voltage electricity, medium voltage Cutoff, U - US-MRO	US-MRO	Ecoinvent 3.11	2024
Natural Gas	heat production, natural gas, at industrial furnace >100kW heat, district or industrial, natural gas Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Use Phase Inputs				
Cleaning Consumable (B2)	market for cleaning consumables, without water, in 13.6% solution state cleaning consumables, without water, in 13.6% solution state Cutoff, U - GLO	GLO	Ecoinvent 3.11	2024
Electricity (B6)	market group for electricity, medium voltage electricity, medium voltage Cutoff, U - US	US	Ecoinvent 3.11	2024

Component	Dataset	Geography	Data Source	Publication Date
Water (B7)	market for tap water tap water Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Waste Outputs				
Hazardous Waste	market for hazardous waste, for incineration hazardous waste, for incineration Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Landfill	market for inert waste, for final disposal inert waste, for final disposal Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024
Electrical Waste	treatment of waste, electrical and electronic cables, open burning waste, electrical and electronic cables Cutoff, U - RoW	RoW	Ecoinvent 3.11	2024

3.7 Data Quality

Table 8. *Data Quality Assessment.*

Data Quality Parameter	Data Quality Discussion
Time-Related Coverage: Age of data and the minimum length of time over which data is collected	The manufacturer provided primary data on product manufacturing for the Elkay facility in Lanark, Illinois on annual production for 2024. Representative datasets (secondary data) for upstream and background processes are generally less than 5 years old.
Geographical Coverage: Geographical area from which data for unit processes is collected to satisfy the goal of the study	The data used in the analysis provide the best possible representation available with current data. Electricity use for product manufacture is modeled using representative data modelled for the specific electricity grid (Midwest Reliability Organization) represented in this study.
Technology Coverage: Specific technology or technology mix	For the most part, data are representative of the actual technologies used for processing, transportation, and manufacturing operations. Representative component datasets, specific to the type of material, are used to represent the actual processes, as appropriate.
Precision: Measure of the variability of the data values for each data expressed	Precision of results are not quantified due to a lack of data. Data collected for operations were typically averaged for one or more years and over multiple operations, which is expected to reduce the variability of results.
Completeness: Percentage of flow that is measured or estimated	The LCA model included all known mass and energy flows for production of the products. In some instances, surrogate data used to represent upstream and downstream operations may be missing some data which is propagated in the model. No known processes or activities contributing to more than 1% of the total environmental impact for each indicator are excluded.
Representativeness: Qualitative assessment of the degree to which the data set reflects the true population of interest	Data used in the assessment represent typical or average processes as currently reported from multiple data sources and are therefore generally representative of the range of actual processes and technologies for production of these materials. Considerable deviation may exist among actual processes on a site-specific basis; however, such a determination would require detailed data collection throughout the supply chain back to resource extraction.
Consistency: Qualitative assessment of whether the study methodology is applied uniformly to the various components of the analysis	The consistency of the assessment is considered to be high. Data sources of similar quality and age are used with a bias towards Ecoinvent v3.11 data where available. Different portions of the product life cycle are equally considered.
Reproducibility: Qualitative assessment of the extent to which information about the methodology and data values would allow an independent practitioner to reproduce the results reported in the study	Based on the description of the data and assumptions used, this assessment would be reproducible by other practitioners. All assumptions, models, and data sources are documented.
Sources of the Data: Description of all primary and secondary data sources	Data representing energy use at the manufacturing facility represents a 12-month average and is considered of high quality due to the length of time over which these data are collected, as compared to a snapshot that may not accurately reflect fluctuations in production. For secondary LCI data, Ecoinvent v3.11 data are used.

Uncertainty of the Information:

Uncertainty related to data, models, and assumptions

Uncertainty related to materials in the products and packaging is low. Actual supplier data for upstream operations was not available for all suppliers and the study relied upon the use of existing representative datasets. These datasets contained relatively recent data (<10 years) but lacked geographical representativeness. Uncertainty related to the impact assessment methods used in the study are high. The impact assessment methodology includes impact potentials, which lack characterization of providing and receiving environments or tipping points.

3.8 Period under review

The period of review is based on a 12-month period from January 2024 through December 2024.

3.9 Allocation

Manufacturing resource use was allocated to the products on a unit basis. Impacts from transportation were allocated based on the mass of material and distance transported. No burdens are allocated across the system boundary with secondary material, secondary fuel, or recovered energy flows arising from waste.

3.10 Comparability

The PCR this EPD was based on was not written to support comparative assertions. EPDs based on different PCRs, or different calculation models, may not be comparable. When attempting to compare EPDs or life cycle impacts of products from different companies, the user should be aware of the uncertainty in the final results due to and not limited to the practitioner's assumptions, the source of the data used in the study, and the specifics of the product modeled.

4. LCA: TECHNICAL INFORMATION AND SCENARIOS**4.1 Transport to the Building Site (A4)**

Table 9. *Elkay Pro Filtration™ Bi-level Bottle Filling Station Transportation Summary, per one unit.*

Name	Unit	Value
Fuel type	-	Diesel
Liters of fuel	l/100 km/ g/tkm	18.7/2.23
Vehicle Type	-	Freight Truck
Transport Distance	km	3,205
Capacity utilization	%	50
Gross mass of products transported ¹	kg	50.8 for LZS; 55.3 for LVRC

¹ including packaging

4.2 Installation into the Building (A5)

Table 10. *Elkay Bottle Filling Stations Installation Summary, per one unit.*

Name	Unit	Value
Ancillary materials	kg	0
Net freshwater consumption specified by water source and fate	m ³	0
Other resources	kg	0
Electricity consumption	kwh	0
Other energy carriers	MJ	0
Product loss per functional unit	kg	0
Waste materials at the construction site before waste processing, generated by product installation	kg	0
Output materials resulting from on-site waste processing	kg	0
Mass of packaging waste specified by type	kg	4.99
Recycle	kg	3.37
Landfill	kg	1.02
Incineration	kg	0.604
Biogenic carbon contained in packaging	kg CO ₂	9.07
Direct emissions to ambient air, soil, and water	kg	0
VOC emissions	µg/m ³	0

4.3 Use

Maintenance (B2)

Table 11. *Elkay Pro Filtration™ Bi-level Bottle Filling Station Maintenance Summary, per one unit.*

Maintenance	Unit	Value
Description of process	-	Daily cleaning with 10 ml of 1% sodium lauryl sulfate solution
Maintenance cycle	Cycles/RSL	3,650
Maintenance cycle	Cycles/ESL	27,375
Net freshwater consumption		
City water disposed to sewer	m ³ /RSL	3.65x10 ⁻²
City water disposed to sewer	m ³ /ESL	0.274
Ancillary materials		
Sodium lauryl sulfate (active ingredient)	kg/RSL	0.365
Sodium lauryl sulfate (active ingredient)	kg/ESL	2.74
Other resources	kg	0
Electricity consumption	kWh	0
Other energy carriers	kWh	0
Power output of equipment	kW	0
Material loss	kg	0
Direct emissions to ambient air, soil, and water	kg	0
Further assumptions for scenario development	-	-

Repair (B3)

No repair is required with the use of the product over the reference service lifetime.

Replacement (B4)

Table 12. *Elkay Pro Filtration™ Bi-level Bottle Filling Station Replacement Summary, per one unit.*

Replacement	Unit	Value
Replacement cycle (RSL)	Number/RSL	10
Replacement cycle (ESL/RSL)-1	Number/ESL	6.5
Electricity consumption	kWh	0
Net freshwater consumption	m ³	0
Ancillary materials	kg	0
Replacement of worn parts (per RSL)	kg	0
Replacement of materials (per ESL)	kg	331 for LZS; 360 for LVRC
Direct emissions to ambient air, soil, and water	kg	0
Further assumptions for scenario development	-	-

Refurbishment (B5)

Module B5 reflects the replacement of filter cartridges over the estimated service lifetime.

Table 13. *Elkay Pro Filtration™ Bi-level Bottle Filling Station Refurbishment Summary, per one unit.*

Replacement	Unit	Value
Refurbishment process	-	N/A
Refurbishment cycle	Cycles/RSL	9
Refurbishment cycle	Cycles/ESL	68
Energy input	kWh	0
Net freshwater consumption	m ³	0
Material input	kg	61
Waste materials	kg	60
Direct emissions to ambient air, soil, and water	kg	0
Further assumption for scenario development	-	-

Operational Energy and Water Use (B6 – B7)

Operational energy and water usage was modeled under guidance of the Part B PCR and utilizing the assumptions stated in Section 3.4.

Table 14. *Elkay Pro Filtration™ Bi-level Bottle Filling Station Use Summary, per one unit.*

Operational Energy and Water Use	Unit	Bottle Filling Station 8 ounces per use
Net freshwater consumption		
City water	m ³ /year	3.54
City water (Per RSL)	m ³ /RSL	35.4
City water (Per ESL)	m ³ /ESL	265.5
Ancillary materials	kg	0
Energy input (per year)	kWh	562
Energy input (per RSL)	kWh/RSL	5,620
Energy input (per ESL)	kWh/ESL	42,150
Equipment power output	kW	0
Characteristic performance	-	-
Direct emissions to ambient air, soil, water	kg	0
Further assumptions for scenario development (per PCR)	Water use is assumed 100% cold water at a volume of 8 ounces. Electricity usage assumed based on drinking fountain energy usage per North Carolina department of environmental quality.	
Number of users per day	60	
Number of uses per user per day	1	
Number of use days per year	260	

4.4 End-of-Life

Table 15. *Elkay Pro Filtration™ Bi-level Bottle Filling Station End-of-Life Summary, per one unit.*

End-of-life		Unit	Value
Assumptions for scenario development			Manual deconstruction, followed by 100 km truck transport to final disposal in landfill
Collection process	Collected separately	kg	0
	Collected with mixed construction waste	kg	45.9 for LZS; 50.3 for LVRC
Recovery	Reuse	kg	0
	Recycling	kg	0
	Landfill	kg	45.9 for LZS; 50.3 for LVRC
	Incineration	kg	0
	Energy recovery	kg	0
	Energy Conversion	n/a	0
Disposal	Final disposal in a landfill	kg	45.9 for LZS; 50.3 for LVRC
Removals of biogenic carbon (excluding packaging)		kg CO2	0

5. LCA: RESULTS

Results of the Life Cycle Assessment for the functional unit of one (1) packaged, installed Elkay Pro Filtration™ Bi-level Bottle Filling Station unit with a reference service life (RSL) of 10 years are presented below. It should be noted that LCA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks. Impact category indicators are estimated using the TRACI 2.1 and the CML-IA characterization methods as required by the PCR. It should also be noted that the indicators prescribed by the PCR do not represent all categories of potential environmental and human health impact associated with the life cycle of bottle filling station products, and this represents a general limitation of the LCA study.

Table 16. *Mandatory Environmental Impact Assessment Categories.*

CML-IA Impact Category	Unit	TRACI 2.1 Impact Category	Unit
GWP: Global Warming Potential	kg CO ₂ eq.	GWP: Global Warming Potential	kg CO ₂ eq.
ODP: Depletion potential of the stratospheric ozone layer	kg CFC 11 eq.	ODP: Depletion potential of the stratospheric ozone layer	kg CFC 11 eq.
AP: Acidification Potential of soil and water	kg SO ₂ eq.	AP: Acidification Potential of soil and water	kg SO ₂ eq.
EP: Eutrophication Potential	kg PO ₄ ³⁻ eq.	EP: Eutrophication Potential	kg N eq.
POCP: Photochemical Oxidant Creation Potential	kg C ₂ H ₄ eq.	SFP: Smog Formation Potential	kg O ₃ eq.
ADPE: Abiotic Depletion Potential, elements	kg Sb eq.	FFD: Fossil Fuel Depletion	MJ Surplus
ADPF: Abiotic Depletion Potential, fossil fuels	MJ eq.		

These impact categories are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined and LCA should continue making advances in their development. However, the EPD users shall not use additional measures for comparative purposes. The following inventory parameters, specified by the PCR, are also reported.

Table 17. *Additional Transparency Categories.*

Resources	Unit	Waste and Outflows	Unit
RPRE: Renewable primary resources used as energy carrier (fuel)	MJ, LHV	HWD: Hazardous waste disposed	kg
RPRM: Renewable primary resources with energy content used as material	MJ, LHV	NHWD: Non-hazardous waste disposed	kg
NRPRE: Non-renewable primary resources used as an energy carrier (fuel)	MJ, LHV	RWD: Radioactive waste, conditioned, to final repository	kg
NRPRM: Non-renewable primary resources with energy content used as material	MJ, LHV	CRU: Components for re-use	kg
SM: Secondary materials	kg	MR: Materials for recycling	kg
RSF: Renewable secondary fuels	MJ, LHV	MER: Materials for energy recovery	kg
NRSF: Non-renewable secondary fuels	MJ, LHV	EE: Recovered energy exported from the product system	kg
RE: Recovered energy	MJ, LHV	EE: Recovered energy exported from the product system	MJ, LHV
FW: Use of new freshwater resources	m ³	-	-

All LCA results are stated to three significant figures in agreement with the PCR for this product and therefore the sum of the total values may not exactly equal 100%. Results for Modules B6 and B7 (Operational Energy and Operational Water Use) are shown separately.

5.1 Elkay Pro Filtration™ LZS Bi-level Bottle Filling Station Results

Table 18. CML-IA Environmental Impact Results for Elkay Pro Filtration™ Bi-level Bottle Filling Stations, per one packaged installed product.

Module	GWP	ODP	AP	EP	POCP	ADPE	ADPF
	kg CO ₂ eq	kg CFC-11 eq	kg SO ₂ eq	kg PO ₄ ⁻³ eq	kg C ₂ H ₄ eq	kg Sb eq	MJ
A1	221	1.50×10 ⁻⁴	1.81	1.10	0.112	8.19×10 ⁻³	2460
A2	19.6	2.16×10 ⁻⁷	6.71×10 ⁻²	2.51×10 ⁻²	3.13×10 ⁻³	2.99×10 ⁻⁵	269
A3	18.1	1.8×10 ⁻⁷	2.71×10 ⁻²	2.12×10 ⁻²	1.95×10 ⁻³	8.62×10 ⁻⁶	115
A1-A3 Total:	259	1.50×10⁻⁴	1.90	1.15	0.117	8.23×10⁻³	2840
A4	31.3	3.44×10 ⁻⁷	9.98×10 ⁻²	3.95×10 ⁻²	4.81×10 ⁻³	4.8×10 ⁻⁵	429
A5	0.476	6.87×10 ⁻⁹	7.88×10 ⁻⁴	5.51×10 ⁻⁴	3.53×10 ⁻⁵	2.91×10 ⁻⁷	2.96
B1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B2	136	2.83×10 ⁻⁶	0.657	1.01	4.6×10 ⁻²	5.07×10 ⁻⁴	1890
B3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B4	1960	9.8×10 ⁻⁴	12.7	11.5	0.93	5.38×10 ⁻²	2.15×10 ⁴
B5	197	8.36×10 ⁻⁵	1.14	0.506	5.2×10 ⁻²	8.02×10 ⁻⁵	2330
B6	1.97×10 ⁴	1.08×10 ⁻⁴	45.9	44.3	2.19	9.62×10 ⁻³	2.39×10 ⁵
B7	337	7.48×10 ⁻⁵	1.43	0.663	7.1×10 ⁻²	7.58×10 ⁻⁴	3540
C1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C2	0.876	9.63×10 ⁻⁹	2.8×10 ⁻³	0.266	1.3×10 ⁻⁴	1.35×10 ⁻⁶	12.0
C3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C4	12.1	2.28×10 ⁻⁸	1.43×10 ⁻²	0.312	2.09×10 ⁻²	1.65×10 ⁻⁶	22.4

Table 19. TRACI 2.1 Environmental Impact Results for Elkay Pro Filtration™ Bi-level Bottle Filling Stations, per one packaged installed product.

Module	GWP	ODP	AP	EP	SFP	FFD
	kg CO ₂ eq	kg CFC-11 eq	kg SO ₂ eq	kg N eq	kg O ₃ eq	MJ Surplus
A1	220	1.00×10 ⁻⁴	1.90	1.83	14.6	154
A2	19.5	1.40×10 ⁻⁷	3.2×10 ⁻²	9.55×10 ⁻³	0.830	17.1
A3	18.0	2.84×10 ⁻⁷	3.16×10 ⁻²	3.78×10 ⁻²	0.652	15.9
A1-A3 Total:	258	1.01×10⁻⁴	1.97	1.88	16.1	187
A4	31.0	4.51×10 ⁻⁷	0.121	4.74×10 ⁻²	2.98	255
A5	0.473	7.93×10 ⁻⁹	9×10 ⁻⁴	1.09×10 ⁻³	1.9×10 ⁻²	0.393
B1	0.00	0.00	0.00	0.00	0.00	0.00
B2	135	3.52×10 ⁻⁶	0.683	0.901	7.12	216
B3	0.00	0.00	0.00	0.00	0.00	0.00
B4	1550	6.54×10 ⁻⁴	16.9	13	107	2880
B5	0.00	0.00	0.00	0.00	0.00	0.00
B6	1.96×10 ⁴	2.48×10 ⁻⁴	46.5	97.6	529	2.46×10 ⁴
B7	333	7.67×10 ⁻⁵	1.49	1.29	20.7	256
C1	0.00	0.00	0.00	0.00	0.00	0.00
C2	0.869	1.26×10 ⁻⁸	3.38×10 ⁻³	1.33×10 ⁻³	8.34×10 ⁻²	1.65
C3	0.00	0.00	0.00	0.00	0.00	0.00
C4	11.8	1.66×10 ⁻⁸	0.712	0.858	0.606	3.14

Table 20. Resource use indicator results for Elkay Pro Filtration™ Bi-level Bottle Filling Stations, per one packaged installed product.

Module	RPR _E	RPR _M	NRPR _E	NRPR _M	SM	RSF	NRSF	RE	FW
	MJ, LHV	MJ, LHV	MJ, LHV	MJ, LHV	kg	MJ, LHV	MJ, LHV	MJ, LHV	m ³
A1	324	0.00	2,460	0.00	0.00	0.00	0.00	0.00	2.12
A2	3.80	0.00	269	0.00	0.00	0.00	0.00	0.00	1.45x10 ⁻²
A3	41.6	0.00	118	0.00	0.00	0.00	0.00	0.00	0.875
A1-A3 Total:	370	0.00	2,847	0.00	0.00	0.00	0.00	0.00	2.82
A4	0.039	0.00	2.97	0.00	0.00	0.00	0.00	0.00	4.10x10 ⁻⁴
A5	0.089	0.00	3.02	0.00	0.00	0.00	0.00	0.00	8.46x10 ⁻³
B1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B2	716	0.00	2,053	0.00	0.00	0.00	0.00	0.00	4.13
B3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B4	3,049	0	15,389	0.00	0.00	0.00	0.00	0.00	20.4
B5	114	0.00	2,471	0.00	0.00	0.00	0.00	0.00	32.3
B6	40,659	0.00	357,859	0.00	0.00	0.00	0.00	0.00	133
B7	383	0.00	4,004	0.00	0.00	0.00	0.00	0.00	264
C1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C2	0.171	0.00	12.0	0.00	0.00	0.00	0.00	0.00	6.52x10 ⁻²
C3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C4	0.166	0.00	12.7	0.00	0.00	0.00	0.00	0.00	1.14

Table 21. Waste and Output indicators for Elkay Pro Filtration™ Bi-level Bottle Filling Stations, per one packaged installed product.

Module	HWD	NHWD	HLRW/ILLRW	CRU	MR	MER	EE
	kg	kg	kg	kg	kg	kg	MJ, LHV
A1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
A2	0.00	0.00	0.00	0.00	0.00	0.00	0.00
A3	3.68x10 ⁻³	8.24	0.00	0.00	0.00	0.00	0.00
A1-A3 Total:	3.68x10⁻³	8.24	0.00	0.00	0.00	0.00	0.00
A4	0.00	0.00	0.00	0.00	0.00	0.00	0.00
A5	0.00	4.99	0.00	0.00	0.00	0.00	0.00
B1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B2	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B4	0.024	372	0.00	0.00	0.00	0.00	0.00
B5	0.00	60	0.00	0.00	0.00	0.00	0.00
B6	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B7	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C2	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C4	0.00	44.0	0.00	0.00	0.00	0.00	0.00

5.2 Elkay Pro Filtration™ LVRC Bi-level Bottle Filling Station Results

Table 22. CML-IA Environmental Impact Results for Elkay Pro Filtration™ Bi-level Bottle Filling Stations, per one packaged installed product.

Module	GWP	ODP	AP	EP	POCP	ADPE	ADPF
	kg CO ₂ eq	kg CFC-11 eq	kg SO ₂ eq	kg PO ₄ ⁻³ eq	kg C ₂ H ₄ eq	kg Sb eq	MJ
A1	234	1.50×10 ⁻⁴	1.88	1.14	0.117	8.33×10 ⁻³	2590
A2	20.7	2.28×10 ⁻⁷	7.04×10 ⁻²	2.64×10 ⁻²	3.29×10 ⁻³	3.16×10 ⁻⁵	284
A3	18.1	1.80×10 ⁻⁷	2.71×10 ⁻²	2.12×10 ⁻²	1.95×10 ⁻³	8.62×10 ⁻⁶	115
A1-A3 Total:	272	1.50×10⁻⁴	1.97	1.19	0.122	8.37×10⁻³	2990
A4	32.8	3.6×10 ⁻⁷	0.105	4.14×10 ⁻²	5.04×10 ⁻³	5.04×10 ⁻⁵	450
A5	0.476	6.87×10 ⁻⁹	7.88×10 ⁻⁴	5.51×10 ⁻⁴	3.53×10 ⁻⁵	2.91×10 ⁻⁷	2.96
B1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B2	136	2.83×10 ⁻⁶	0.657	1.01	4.6×10 ⁻²	5.07×10 ⁻⁴	1890
B3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B4	2060	9.8×10 ⁻⁴	13.1	11.3	0.965	5.48×10 ⁻²	2.26×10 ⁴
B5	197	8.36×10 ⁻⁵	1.14	0.506	5.2×10 ⁻²	8.02×10 ⁻⁵	2330
B6	1.97×10 ⁴	1.08×10 ⁻⁴	45.9	44.3	2.19	9.62×10 ⁻³	2.39×10 ⁵
B7	337	7.48×10 ⁻⁵	1.43	0.663	7.1×10 ⁻²	7.58×10 ⁻⁴	3540
C1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C2	0.924	1.02×10 ⁻⁸	2.95×10 ⁻³	0.231	1.4×10 ⁻⁴	1.42×10 ⁻⁶	12.7
C3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C4	12.0	2.39×10 ⁻⁸	1.46×10 ⁻²	0.277	2.08×10 ⁻²	1.75×10 ⁻⁶	23.7

Table 23. TRACI 2.1 Environmental Impact Results for Elkay Pro Filtration™ Bi-level Bottle Filling Stations, per one packaged installed product.

Module	GWP	ODP	AP	EP	SFP	FFD
	kg CO ₂ eq	kg CFC-11 eq	kg SO ₂ eq	kg N eq	kg O ₃ eq	MJ Surplus
A1	231	1.00×10 ⁻⁴	1.93	1.83	14.7	154
A2	20.5	1.4×10 ⁻⁷	3.2×10 ⁻²	9.55×10 ⁻³	0.830	17.1
A3	18.0	2.84×10 ⁻⁷	3.16×10 ⁻²	3.78×10 ⁻²	0.652	15.9
A1-A3 Total:	270	1.01×10⁻⁴	1.99	1.88	16.2	187
A4	32.5	4.73×10 ⁻⁷	0.127	4.97×10 ⁻²	3.12	255
A5	0.473	7.93×10 ⁻⁹	9×10 ⁻⁴	1.09×10 ⁻³	1.9×10 ⁻²	0.393
B1	0.00	0.00	0.00	0.00	0.00	0.00
B2	135	3.52×10 ⁻⁶	0.683	0.901	7.12	216
B3	0.00	0.00	0.00	0.00	0.00	0.00
B4	1550	6.54×10 ⁻⁴	16.9	13	107	2880
B5	0.00	0.00	0.00	0.00	0.00	0.00
B6	1.96×10 ⁴	2.48×10 ⁻⁴	46.5	97.6	529	2.46×10 ⁴
B7	333	7.67×10 ⁻⁵	1.49	1.29	20.7	256
C1	0.00	0.00	0.00	0.00	0.00	0.00
C2	0.916	1.33×10 ⁻⁸	3.57×10 ⁻³	1.4×10 ⁻³	8.8×10 ⁻²	1.74
C3	0.00	0.00	0.00	0.00	0.00	0.00
C4	11.7	1.81×10 ⁻⁸	0.712	0.76	0.615	3.32

Table 24. Resource use indicator results for Elkay Pro Filtration™ Bi-level Bottle Filling Stations, per one packaged installed product.

Module	RPR _E	RPR _M	NRPR _E	NRPR _M	SM	RSF	NRSF	RE	FW
	MJ, LHV	MJ, LHV	MJ, LHV	MJ, LHV	kg	MJ, LHV	MJ, LHV	MJ, LHV	m ³
A1	335	0.00	2,600	0.00	0.00	0.00	0.00	0.00	2.12
A2	4.00	0.00	284	0.00	0.00	0.00	0.00	0.00	1.53
A3	41.6	0.00	124	0.00	0.00	0.00	0.00	0.00	0.875
A1-A3 Total:	381	0.00	3,008	0.00	0.00	0.00	0.00	0.00	4.53
A4	0.065	0.00	4.91	0.00	0.00	0.00	0.00	0.00	6.70x10 ⁻⁴
A5	0.102	0.00	3.47	0.00	0.00	0.00	0.00	0.00	1.28x10 ⁻²
B1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B2	716	0.00	2053	0.00	0.00	0.00	0.00	0.00	4.13
B3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B4	3,485	0.00	17,799	0.00	0.00	0.00	0.00	0.00	26.7
B5	114	0.00	2,471	0.00	0.00	0.00	0.00	0.00	32.3
B6	40,659	0.00	357,859	0.00	0.00	0.00	0.00	0.00	133
B7	383	0.00	4,004	0.00	0.00	0.00	0.00	0.00	264
C1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C2	0.180	0.00	12.7	0.00	0.00	0.00	0.00	0.00	1.55x10 ⁻³
C3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C4	0.365	0.00	13.9	0.00	0.00	0.00	0.00	0.00	1.93

Table 25. Waste and Output indicators for Elkay Pro Filtration™ Bi-level Bottle Filling Stations, per one packaged installed product.

Module	HWD	NHWD	HLRW/ILLRW	CRU	MR	MER	EE
	kg	kg	kg	kg	kg	kg	MJ, LHV
A1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
A2	0.00	0.00	0.00	0.00	0.00	0.00	0.00
A3	3.68x10 ⁻³	8.24	0.00	0.00	0.00	0.00	0.00
A1-A3 Total:	3.68x10⁻³	8.24	0.00	0.00	0.00	0.00	0.00
A4	0.00	0.00	0.00	0.00	0.00	0.00	0.00
A5	0.00	4.99	0.00	0.00	0.00	0.00	0.00
B1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B2	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B4	0.024	388	0.00	0.00	0.00	0.00	0.00
B5	0.00	60.0	0.00	0.00	0.00	0.00	0.00
B6	0.00	0.00	0.00	0.00	0.00	0.00	0.00
B7	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C1	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C2	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C3	0.00	0.00	0.00	0.00	0.00	0.00	0.00
C4	0.00	46.4	0.00	0.00	0.00	0.00	0.00

6. LCA: INTERPRETATION

The interpretation of this study included the use of evaluation and sensitivity checks to steer the iterative process during the assessment, and a final evaluation including completeness, sensitivity, and consistency checks, at the end of the study.

The contributions to total impact indicator results are dominated by the use phase impacts from the energy and resource usage during the replacement (B4) module, operational energy usage (B6) and water usage (B7) module. When examining the results without modules B4, B6 and B7 the results for Elkay Pro Filtration™ Bi-level Bottle Filling Stations are dominated by the raw material module (A1), with the product maintenance module (B2) also showing significant impacts.

Figure 2 shows the contribution analysis of the CML-IA and TRACI 2.1 impact indicator results for the Elkay Pro Filtration™ Bi-level Bottle Filling Station products without modules B4, B6, and B7.

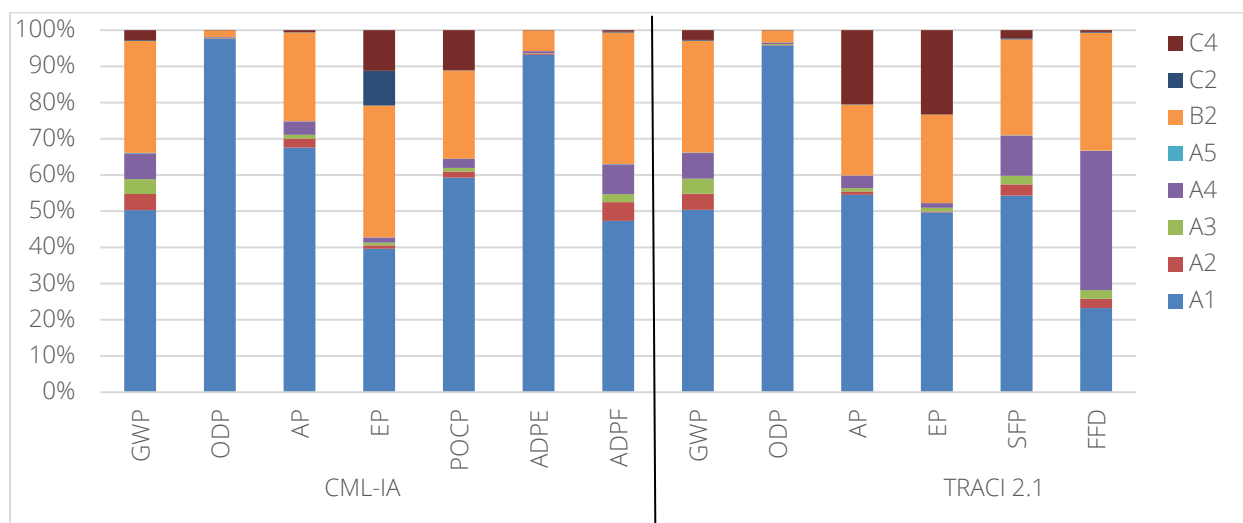


Figure 2. Contribution analysis for the Elkay Pro Filtration™ LZS Bi-level Bottle Filling Stations (without Modules B4, B6, and B7).

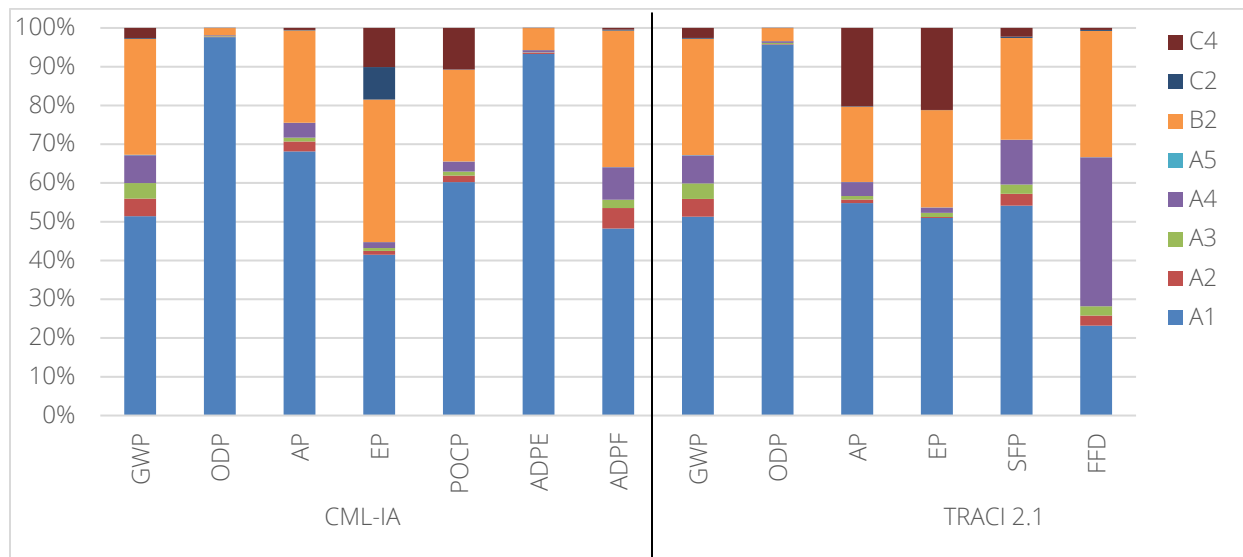


Figure 3. Contribution analysis for the Elkay Pro Filtration™ LVRC Bi-level Bottle Filling Stations (without Modules B4, B6, and B7).

7. ADDITIONAL ENVIRONMENTAL INFORMATION

Elkay's Bottle Filling Stations within this EPD can be used to help achieve USGBC LEED v4 points and comply with building codes. No environmental or health impacts are expected due to extraordinary effects including fire and/or water damage and product destruction.

For more information on Elkay's certifications and environmental initiatives please visit their website at www.elkay.com/product-sustainability

To access the technical specification sheet for Elkay's Pro Filtration™ Bi-level Bottle Filling Stations please visit the following link at https://www.elkayfiles.com/spec-sheets/lzstl8wsbpro_spec.pdf

8. REFERENCES

- CML-IA 4.1 Characterization Factors. Leiden University, Institute of Environmental Sciences. April 2013. <https://www.universiteitleiden.nl/en/research/research-output/science/cml-ia-characterisation-factors>
- Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI). U.S. EPA. <https://www.epa.gov/chemical-research/tool-reduction-and-assessment-chemicals-and-other-environmental-impacts-traci>
- Ecoinvent Centre Centre (2024) ecoinvent data from v3.11 Swiss Center for Life Cycle Inventories, Dubendorf. 2024. <http://www.ecoinvent.org>
- ISO 14025:2006 Environmental labels and declarations – Type III environmental declarations – Principles and Procedures.
- ISO 14040: 2006/Amd 1:2020 Environmental Management – Life cycle assessment – Principles and Framework
- ISO 14044: 2006/Amd 1:2017/ Amd 2:2020 Environmental Management – Life cycle assessment – Requirements and Guidelines.
- ISO 21930: 2017 Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services
- Life Cycle Assessment of Bottle Filling Stations. SCS Global Services Final Report. Prepared for Elkay Manufacturing Company with updated Appendix. May 2026.
- SCS Type III Environmental Declaration Program: Program Operator Manual. V12.0 December 2023. SCS Global Services.
- UL PCR Guidance for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report Requirements. Version 4.0. December 2022.
- UL PCR Guidance for Building-Related Products and Services Part B: Kitchen and Bath Fixture Fittings and Accessory Products EPD Requirements. Version 1.0. October 2020.
- State Energy Office, N.C. Department of Administration and the U.S. Department of Energy. "Drinking Fountains & Water Coolers Energy Saving Fact Sheet." March 2010. <https://www.deq.nc.gov/environmental-assistance-and-customer-service/ias-energy-efficiency/opportunities/drinking-fountains/download>

9. APPENDIX

An average product is reported for each of the two product categories, LZS and LVRC in the Pro Filtration Bi-level Bottle Filling Station line. The following product variations which include differences in color, bubbler mouthpiece type, or filter type are listed below.

Table 26. *Elkay Pro Filtration™ Bi-level Bottle Filling Station SKUs covered in this study.*

SKU	Base Model	Finish/Type	Configuration	Configuration with UV
LZSTL8WSBPRO	LZSTL8WS	Black (B)	Standard, 2FL10, 2FLP4, FL6, FL6-FSR5, FLP4, FLP4-FSR5, FSR5	UV, 2FL10-UV, 2FLP4-UV, FL6-UV, FL6-FSR5-UV, FLP4-UV, FLP4-FSR5-UV, FSR5-UV
LZSTL8WSSPRO	LZSTL8WS	Stainless (S)	Standard, 2FL10, 2FLP4, FL6, FL6-FSR5, FLP4, FLP4-FSR5, FSR5	UV, 2FL10-UV, 2FLP4-UV, FL6-UV, FL6-FSR5-UV, FLP4-UV, FLP4-FSR5-UV, FSR5-UV
LZSTL8WSWPRO	LZSTL8WS	White (W)	Standard, 2FL10, 2FLP4, FL6, FL6-FSR5, FLP4, FLP4-FSR5, FSR5	UV, 2FL10-UV, 2FLP4-UV, FL6-UV, FL6-FSR5-UV, FLP4-UV, FLP4-FSR5-UV, FSR5-UV
LZSTL8WSVRBPRO	LZSTL8WS	VR Black (VRB)	Standard, 2FL10, 2FLP4, FL6, FL6-FSR5, FLP4, FLP4-FSR5, FSR5	UV, 2FL10-UV, 2FLP4-UV, FL6-UV, FL6-FSR5-UV, FLP4-UV, FLP4-FSR5-UV, FSR5-UV
LZSTL8WSVRSPRO	LZSTL8WS	VR Stainless (VRS)	Standard, 2FL10, 2FLP4, FL6, FL6-FSR5, FLP4, FLP4-FSR5, FSR5	UV, 2FL10-UV, 2FLP4-UV, FL6-UV, FL6-FSR5-UV, FLP4-UV, FLP4-FSR5-UV, FSR5-UV
LZSTL8WSVRWPRO	LZSTL8WS	VR White (VRW)	Standard, 2FL10, 2FLP4, FL6, FL6-FSR5, FLP4, FLP4-FSR5, FSR5	UV, 2FL10-UV, 2FLP4-UV, FL6-UV, FL6-FSR5-UV, FLP4-UV, FLP4-FSR5-UV, FSR5-UV
LVRCTL8WSPRO	LVRCTL8WS	VR	Standard, 2FL10, 2FLP4, FL6, FL6-FSR5, FLP4, FLP4-FSR5, FSR5	UV, 2FL10-UV, 2FLP4-UV, FL6-UV, FL6-FSR5-UV, FLP4-UV, FLP4-FSR5-UV, FSR5-UV

For more information please contact



Elkay Manufacturing Company

1333 Butterfield Road, Suite 200

Downers Grove, IL 60515

CustCare@Elkay.com | +1 (800) 476-4106

www.elkay.com



SCS Global Services

2000 Powell Street, Ste. 600, Emeryville, CA 94608 USA

Main +1.510.452.8000 | fax +1.510.452.8001